

TOWNSHIP 26 NORTH, RANGE 105 WEST, OF THE SIXTH PRINCIPAL MERIDIAN, WYOMING.

PERPETUATION OF CERTAIN CORNERS

Cor. No. 5, Parcel A, monumented with a stainless steel post, 2 1/2 ins. diam., as described in the 2000-02 field notes of the dependent resurvey of T. 26 N., R. 105 W.

from which

A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set 27 ins. in the ground over a plastic encased magnetic marker, for a reference monument, bears S. 20° E., 37.0 lks. dist., with brass cap mkd. RM T26N R105W S 28 COR 5 PAR A 24.4 FT TO COR. 2005 and an arrow pointing to the cor. Set a steel fence post nearby.

A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set 27 ins. in the ground over a plastic encased magnetic marker, for a reference monument, bears S. 51° E., 39.2 lks. dist., with brass cap mkd. RM T26N R105W S 28 COR 5 PAR A 25.9 FT TO COR. 2005 and an arrow pointing to the cor. Set a steel fence post nearby.

Cor. No. 6, Parcel A, monumented with a stainless steel post, 2 1/2 ins. diam., as described in the 2000-02 field notes of the dependent resurvey of T. 26 N., R. 105 W.

from which

A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set 27 ins. in the ground over a plastic encased magnetic marker, for a reference monument, bears N. 55° E., 34.8 lks. dist., with brass cap mkd. RM T26N R105W S 28 COR 6 PAR A 23.0 FT TO COR. 2005 and an arrow pointing to the cor. Set a steel fence post nearby.

A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set 27 ins. in the ground over a plastic encased magnetic marker, for a reference monument, bears S. 55° E., 26.8 lks. dist., with brass cap mkd. RM T26N R105W S 28 COR 6 PAR A 17.7 FT TO COR. 2005 and an arrow pointing to the cor. Set a steel fence post nearby.

Cor. No. 7, Parcel A, monumented with a stainless steel post, 2 1/2 ins. diam., as described in the 2000-02 field notes of the dependent resurvey of T. 26 N., R. 105 W.

from which

A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set 27 ins. in the ground over a plastic encased magnetic marker, for a reference monument, bears N. 59° E., 24.1 lks. dist., with brass cap mkd. RM T26N R105W S 28 COR 7 PAR A 15.9 FT TO COR. 2005 and an arrow pointing to the cor. Set a steel fence post nearby.

A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set 27 ins. in the ground over a plastic encased magnetic marker, for a reference monument, bears S. 10° W., 25.5 lks. dist., with brass cap mkd. RM T26N R105W S 28 COR 7 PAR A 16.8 FT TO COR. 2005 and an arrow pointing to the cor. Set a steel fence post nearby.

SURVEY INFORMATION AND CERTIFICATE

This plat represents the entire record of the establishment of reference monuments for certain corners of Parcel A, Section 28, Township 26 North, Range 105 West, Sixth Principal Meridian, Wyoming.

At the request of Bernie Weynand, Assistant Field Manager, BLM Rock Springs Field Office, reference monuments were set to perpetuate the positions of certain monuments established during the metes and bounds survey of Parcel A, Section 28. These corners were at risk of being destroyed or displaced during the development of a BLM historic site located in Parcel A.

Lynn A. Forbes executed the metes and bounds survey of Parcel A, Section 28, under this same group in 2000-02. Reference should be made to the plat approved June 9, 2003, for survey information.

I, Ollian T. Shockley, Cadastral Surveyor, HEREBY CERTIFY upon honor that, in pursuance of Supplemental Special Instructions dated July 15, 2005, and Assignment Instructions dated July 15, 2005, for Group No. 674, Wyoming, I have perpetuated certain corners of Parcel A, Section 28, Township 26 North, Range 105 West, Sixth Principal Meridian, Wyoming, and that this plat in one sheet represents the entire record of this perpetuation. Fieldwork executed July 18, 2005, and has been made in strict conformity with the special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, 1973, and in specific manner described hereon.

Ollian T. Shockley
Ollian T. Shockley,
Cadastral Surveyor

January 30, 2008
Date

UNITED STATES DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

Cheyenne, Wyoming

January 30, 2008

This plat representing the entire record of this perpetuation of certain corners, having been correctly executed in accordance with the requirements of law and the regulations of this Bureau, is hereby accepted.

For the Director


John P. Lee

John P. Lee
Chief Cadastral Surveyor for Wyoming

TOWNSHIP 26 NORTH, RANGE 105 WEST, OF THE SIXTH PRINCIPAL MERIDIAN, WYOMING.

DEPENDENT RESURVEY, SUBDIVISION OF SECTION 28 AND METES AND BOUNDS SURVEY

Sec. 21

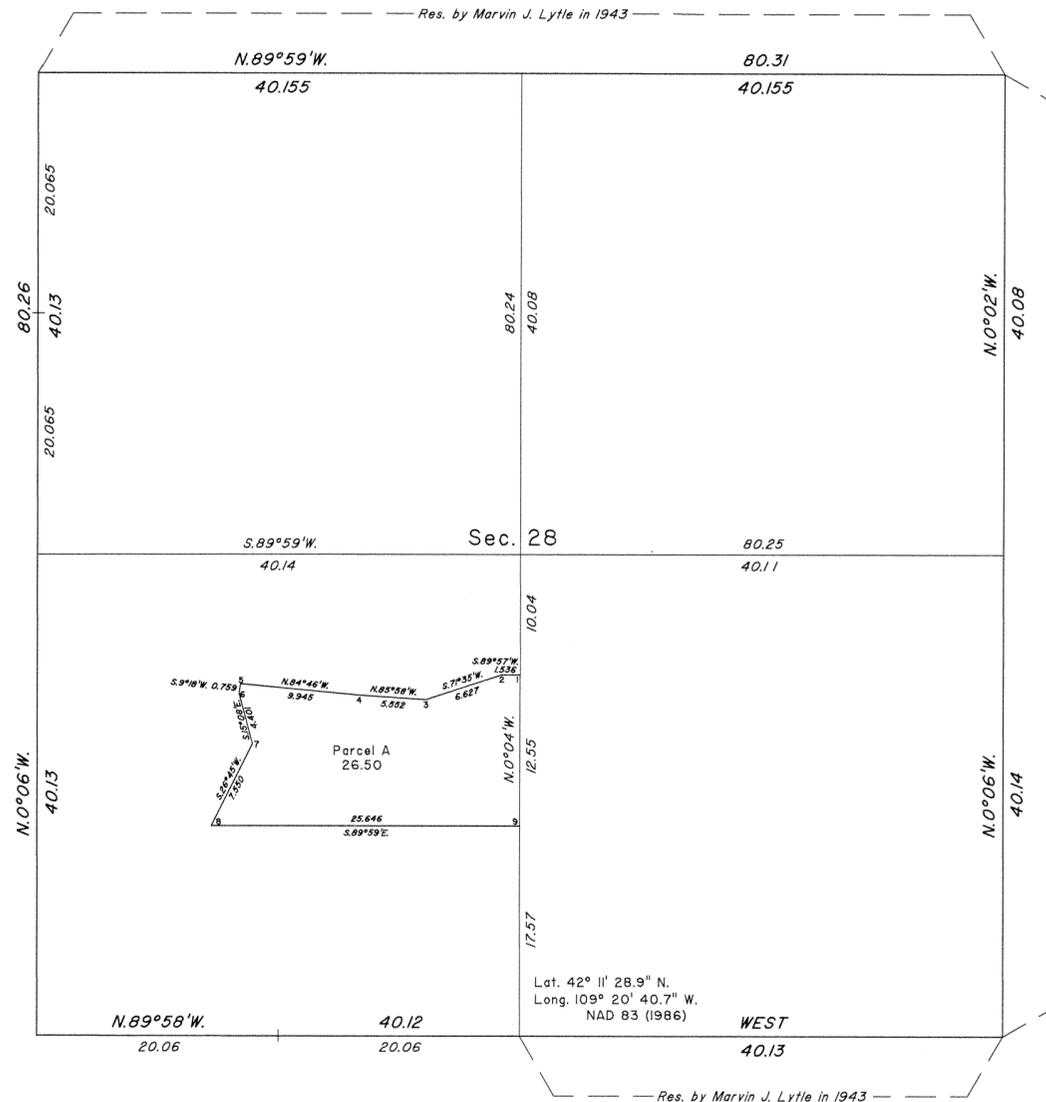

A history of surveys is contained in the field notes.

This plat represents the dependent resurvey of a portion of the subdivisional lines designed to restore the corners in their true original locations according to the best available evidence, the subdivision of section 28, and the metes and bounds survey of Parcel A, Section 28, T. 26 N., R. 105 W., Sixth Principal Meridian, Wyoming.

The lottings and areas are as shown on the plat approved February 24, 1892.

Survey executed by Lynn A. Forbes, Cadastral Surveyor, beginning September 13, 2000, and completed August 5, 2002, pursuant to Special Instructions dated April 17, 2000, for Group No. 674, Wyoming.

UNITED STATES DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

Cheyenne, Wyoming JUNE 9, 2003


This plat is strictly conformable to the approved field notes, and the survey, having been correctly executed in accordance with the requirements of law and the regulations of this Bureau, is hereby accepted.

For the Director

Chief Cadastral Surveyor for Wyoming

TOWNSHIP No. 26 NORTH, RANGE No. 105 WEST OF THE SIXTH PRINCIPAL MERIDIAN, WYOMING.

DEPENDENT RESURVEY

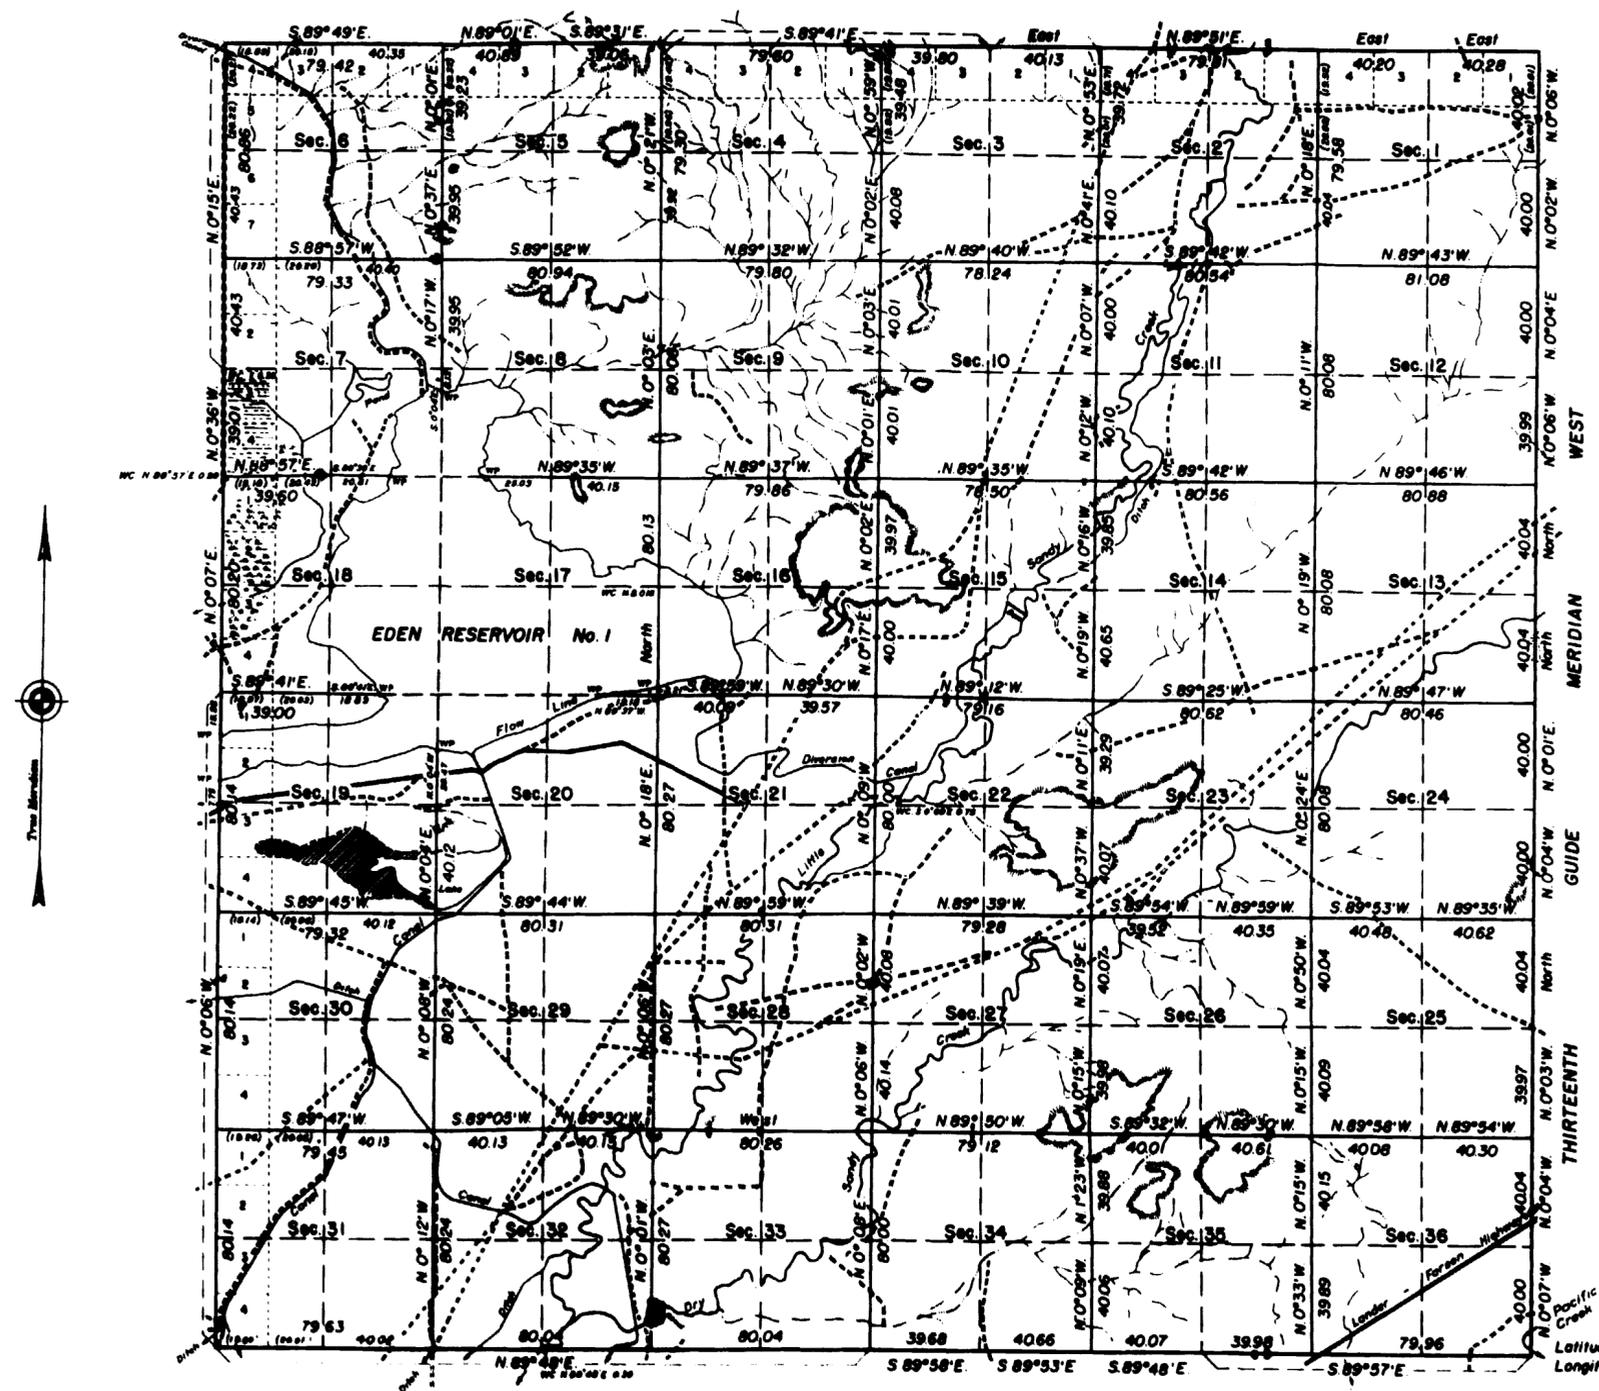

MEMORANDUM

This plat of the resurvey of Township No. 26 North, Range No. 105 West, of the Sixth Principal Meridian, Wyoming, delineates a retracement and reestablishment of the lines of the original survey as shown upon the plat approved February 24, 1892, in their true original position according to the best available evidence of the position of the original corners; all differences between the measurements shown on the original plat and those derived in the retracement have been distributed proportionally between accepted corners in accordance with surveying rules; reference will be made to the original plat for the showing of the areas and the more detailed descriptions of the various smaller subdivisions

Resurvey authorized by General Land Office letter "E" dated August 18, 1939.

UNITED STATES DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

Denver, Colorado, October 8, 1946.


This plat of Township No. 26 North, Range No. 105 West, of the Sixth Principal Meridian, Wyoming, is strictly conformable to the field notes of the survey thereof which have been examined and approved

Washington, D. C., August 5, 1947.

The survey represented by this plat having been correctly executed in accordance with the requirements of law and the regulations of this office, is hereby accepted.

[Signature]
Acting Chief Cadastral Engineer

[Signature]
Assistant Director



LINES DESIGNATED	BY WHOM SURVEYED	GROUP No	DATE OF SPECIAL INSTRUCTIONS	WHEN SURVEYED	
				BEGUN	COMPLETED
Extorians and Subdivisional	Marvin J Lytle	179	April 8, 1943	May 8, 1943	June 7, 1943

Topography within sections compiled from aerial photographs and coordinated with section line control obtained during survey

